

Photovoltaic Module Monocrystalline36

KEY FEATURES



High module efficiency through superior manufacturing technology



No power loss thanks to improved temperature co-efficient caused by 3 busbar solar cell



Strictly control the micro-crack of solar cells and the other non visible defect of internal modules



Module can bear snow loads up to 5400Pa and wind loads up to 2400Pa



Manufactured according to and certified international I Quality and Environment Management System



Using advanced low reflection and high light transmission glass and cell sheet surface cutting technology, in the weak light environment can also play a good performance.




Certificates

- IEC61215, IEC61730, CQC, CE, TUV
- ISO9001:2008
- ISO14001:2004
- BSOHSAS18001:2007

Warranties

- 10 years product warranty
- 25 years power warranty

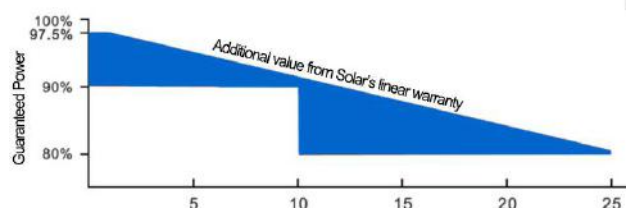



Electrical Characteristics

Model	JY-150S6	JY-155S6	JY-160S6	JY-165S6	JY-170S6
Maximum Power at STC(Pmax)	150W	155W	160W	165W	170W
Optimum Operating Voltage (Vmp)	17.86V	18.21V	18.23V	18.25V	18.28V
Optimum Operating Current (Imp)	8.399A	8.512A	8.777A	9.041A	9.223A
Open-Circuit Voltage (Voc)	22.38V	22.46V	22.48V	22.5V	22.52V
Short-Circuit Current (Isc)	8.937A	9.202A	9.49A	9.778A	9.822A
Solar Cell Efficiency (%)	17.44	18.02	18.60	19.18	20.00
Solar Module Efficiency (%)	15.06	15.56	16.06	16.57	16.90
Operating Temperature	-40to85°C				
Maximum System Voltage	DC1000				
Maximum Series Fuse Rating	15A				
Power Tolerance	0~+3%				
STC:Irradiance 1000W/m ² ,Modules Temperature 25°C,AM=1.5					

Temperature Coefficient and Mechanical Characteristics

Nominal Operating Cell Temperature (NOCT)	47°C+/-2°C
Temperature Coefficient of Pmax	-0.47%/°C
Temperature Coefficient of VOC	-0.346%/°C
Temperature Coefficient of ISC	+0.036%/°C
Solar cell	Mono156*156mm
No.of cells	36 (4*9)
Dimensions	1480mm*673mm*30mm
Weight	11kg
Front glass	3.2mm tempered glass
Frame	Anodized aluminium alloy
Junction box	PV--YH0906/PV-JB002
Connector	Plug and socket
Output cables	PV 4.0mm ² ,0.9m
1*20'	490pcs
1*40'	1050pcs
1*40'HQ	1260pcs

Engineering Drawings

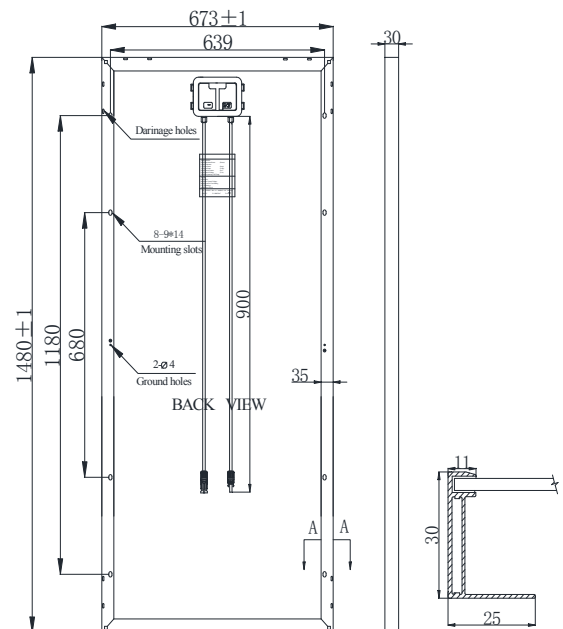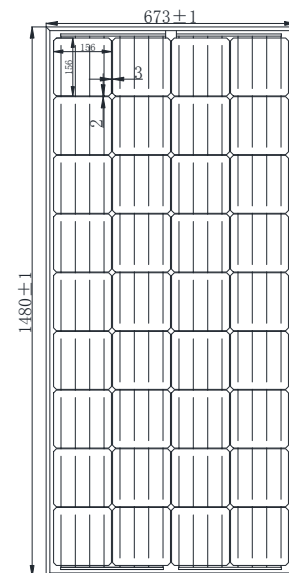

IV-Curves

